SLQ-4N-46

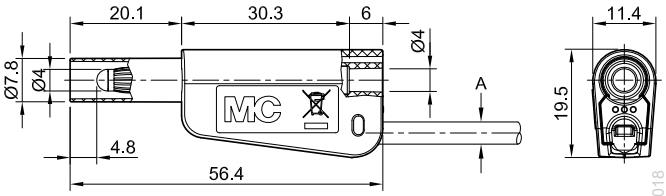

Item number 66.2022-*

Stackable, Ø 4 mm, with spring-loaded MULTILAM, for self-assembly of test leads. With rigid insulating sleeve. Nickel-plated version. Cross hole for solder connection.

Technical data	
Diameter of plug system	4 mm
Rated Values	1000 V, CAT II, 32 A / 600 V, CAT III, 32 A
Surface treatment electrical contact	Ni
Base material electrical contact	CuZn
Standard color(s) *	20 21 22 23 24 25 26 27 28 29 30
Outer diameter	4.6 mm
Test accessory acc. to	IEC EN 61010-031
Component parts	KT-SL-4-46
Approvals	UR

DONHO
唐和股份有限公司

萬和儀器有限公司
ONEHO INSTRUMENT LTD.

台北公司
台北市內湖區瑞光路618號8樓
02 2627 1088

台中公司
台中市西屯區朝富路213號23樓-2(A5)
04 2238 8896

高雄分公司
高雄市楠梓區德民路220號
07 365 1388

Staubli is a trademark of Stäubli International AG, registered in Switzerland and other countries. We reserve the right to modify product specifications without prior notice. © Stäubli 2022 | ec.marcom@staubli.com | Photo credits: Stäubli | **www.staubli.com**

©2018 Staubli is a trademark of Stäubli International AG, registered in Switzerland and other countries. We reserve the right to modify product specifications without prior notice. Data sheet XM-BB/4 10.2018 Data sheet SLQ-4N-46 03.2022