
SARK-4N-S10



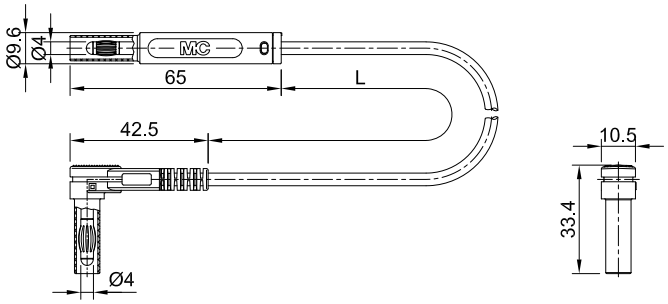

Item number 66.1050- [ ] *

Highly flexible. One end with in-line Ø 4 mm MULTILAM plug with rigid insulating sleeve. The other end with right-angled Ø 4 mm MULTILAM plug with rigid insulating sleeve.

Technical data	
Diameter of plug system	4 mm
Rated Values	1000 V, CAT III, 19 A / 600 V, CAT IV, 19 A
Surface treatment electrical contact	Ni
Base material electrical contact	CuZn
Standard color(s) *	21 22 23 24 25
Optional color(s)	20 26 27 29
Lead lengths [ ]	100; 150; 200 cm
Lead insulation	SIL
Lead cross section	1,0 mm²
Test accessory acc. to	IEC EN 61010-031
User-Information	I 141
Approvals	UL, CE

DONHO 唐和股份有限公司

台北總公司
台北市內湖區瑞光路618號8樓
02 2627 1088

台中分公司
台中市西屯區朝富路213號22樓-2
04 2252 5037

高雄分公司
高雄市楠梓區德民路220號
07 365 1388

Staubli is a trademark of Stäubli International AG, registered in Switzerland and other countries. We reserve the right to modify product specifications without prior notice. © Stäubli 2024 | ec.marcom@staubli.com | Photo credits: Stäubli | **www.staubli.com**

Data sheet SARK-4N-S10 08.2024